



### 4-PIECE WICKER BISTRO SET

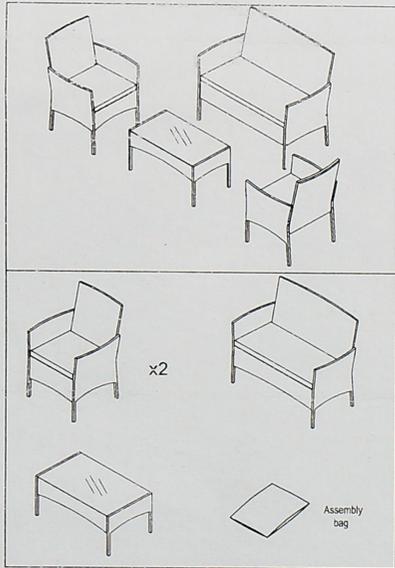

### Single Chairs (Do this two times)


Item no.	Reference Image	Description	Qty.
A		Left Arm Rest	1
B		Right Arm Rest	1
C		Seat Back	1
D		Seat Base	1
E		M6 x 35 Socket Head Cap Screw	11
F		Flat Washer	11
G		4-mm Allen Key	1



1

Attach the left arm rest(A) and right arm rest(B) to seat back (C) using M6\*35 socket head cap screw(E) with a flat washer(F) as shown. Do this in four places.

### Single Chairs (Do this two times)




2

Secure the seat base (D) to the arm rests (A & B) using M6 x 35 screws (E) with a washer (F). Do this in seven places.

### Double Chairs (Do this two times)

Item no.	Reference Image	Description	Qty.
A		Left Arm Rest	1
B		Right Arm Rest	1
C1		Seat Back	1
D1		Seat Base	1
E		M6 x 35 Socket Head Cap Screw	12
F		Flat Washer	12
G		4-mm Allen Key	1



1

Attach the left arm rest(A) and right arm rest(B) to seat back (C1) using M6\*35 socket head cap screw (E) with a flat washer(F) as shown. Do this in four places.


### Double Chairs (Do this two times)

2

Secure the seat base (D1) to the arm rests (A & B) using M6 x 35 screws (E) with a washer (F). Do this in six places.


Secure the seat base (D1) to the seat back (C1)

using M6 x 35 screws (E) with a washer (F). Do this in two places.



### Coffee table


Item no.	Reference Image	Description	Qty.
H		Table Leg	2
I		Leg Brace	2
J		Glass Top	1
E		M6x35 Socket Head Cap Screw	8
F		Flat Washer	8
G		Allen Key	1



1

Attach two (I) Leg Brace to two (H) Table Legs with eight (E) M6x35 Screws and (F) Flat Washers. Use (G) Allen Key. DO NOT YET TIGHTEN

### Coffee table



2

Stand up the assembly and place (C) Glass Top. Well done!